


Changing the Commander NT & BCM Time and Date

To Set Time and Date:

Programming Overlay:


When you begin programming, a group of keys on the keystation become the keys for moving through programming headings and settings. The programming overlay is a paper cutout that shows what the four keys do during programming.















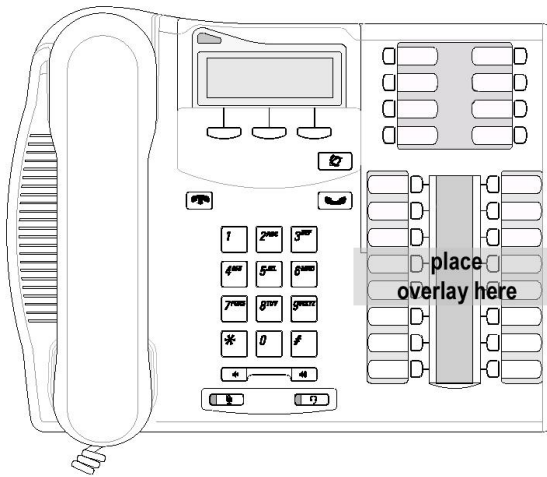
Placing the programming overlay:



Begin the programming session:

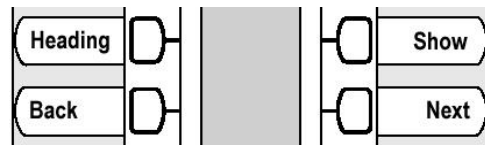Display will show



1. Press 
2. Press        
3. Press     
4. Press  five times

Feature:

Password: RETRY

Time&Date

- | | |
|---|----------------------------|
| 4. Press Show | Hour:01
NEXT CHANGE |
| 5. Press dial key pad to enter the hour | Hour: __
CANCL |
| 6. This will display if you have enter number less than 12 | AM
OK CHANGE |
| 7. Press <u>NEXT</u> | Hour:13
NEXT CHANGE |
| 8. Press <u>CHANGE</u> | Minutes: 00
NEXT CHANGE |
| 9. Press dial keys to enter minutes | Minutes: __
CANCL |
| 10. Press <u>NEXT</u> | Minutes: 30
NEXT CHANGE |
| 11. Press <u>CHANGE</u> | YEAR: 99
NEXT CHANGE |
| 12. Press dial keys to enter year | YEAR: __
CANCL |
| 13. Press <u>NEXT</u> | Months: 01
NEXT CHANGE |
| 14. Press <u>CHANGE</u> | Months: __
CANCL |
| 15. Press Dial keys to enter month | Months: __
CANCL |
| 16. Press <u>NEXT</u> | Day:01
NEXT CHANGE |
| 17. Press <u>CHANGE</u> | Day: __
CANCL |

18. Press Dial keys to enter day

Day:15
NEXT CHANGE

19. Press  to end your session

End of session